

# ISC-BPQ2 - Blue Line Gen2 Quad PIR Motion Detector (12 m [40 ft] coverage)

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Dynamic Temperature Compensation – superior catch performance in any environment
- ▶ Wall to Wall Coverage – superior catch performance
- ▶ Flexible Mounting Height, No Adjustments – reduce installation time and false alarms, improve catch performance
- ▶ Self-locking Enclosure with Integrated Bubble Level – reduce installation time

The Blue Line Gen2 Quad PIR Detector (ISC-BPQ2-W12) uses two individual sensors that operate like two PIRs in one detector. Each sensor processes signals separately. Both must activate to generate an alarm signal. This improves false alarm immunity relative to a standard PIR, because false alarm sources such as noise spikes and small animals are ignored. Quad detectors also provide superior catch performance versus a standard PIR or dual-technology detector. They are particularly well suited for challenging installation situations; for example, cases where cross catch of intruders cannot be guaranteed or where intruders are able to cross the detection pattern very quickly.

## Functions

### First Step Processing (FSP)

*First Step Processing (FSP)* almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing.

This eliminates the need for the installer to select the sensitivity level, thus improving ease of installation and reliability.

### Dynamic Temperature Compensation

The detector intelligently adjusts its sensitivity to maintain its ability to identify human intruders at virtually any temperature.

### Wall-to-Wall Coverage

An improved lookdown zone and coverage range of 12 m x 12 m (40 ft x 40 ft) provide wall-to-wall coverage.

### Self-locking Enclosure

The sliding self-locking enclosure has an integrated bubble level and custom gap-free, lift-gate style terminal blocks to make installation easier.

### Sealed Optics and Electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

**Test Features**

Externally visible alarm LED can be disabled after installation.

**Certifications and approvals**


This detector is also designed to comply with the following:

- Europe Complies with EN50131-2-2 Grade 2
- Complies with EN50130-5 Class II
- Complies with EN60529, EN50102 (IP30, IK04)
- Complies with Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances (RoHS)

Region	Certification	
Europe	CE	2004/108/EC EMC Directive (EMC); 2006/95/EC Low-Voltage Directive (LVD); 2011/65/EU Restriction of the
Belgium	INCERT	B-509-0051/b
USA	UL	cULus - ANSR: Intrusion-detection Units (UL 639), ANSR7: Intrusion-detection Units Certified for Canada (ULC-S306)
France	AFNOR	2620200002A0 [-W12]
	AFNOR	EN50131-2-2 [-W12]
Sweden	INTYG	11-267 [-W12]
the Netherlands	NCP	2011062 [ISC-BPR2-w12, -WP12, ISC-BPQ2-W12, ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G]]
Bulgaria	GD FSPP	
	GD FSPP	GODKJENNELSESBEVIS [-W12]

**Installation/configuration notes**

**Coverage Patterns**

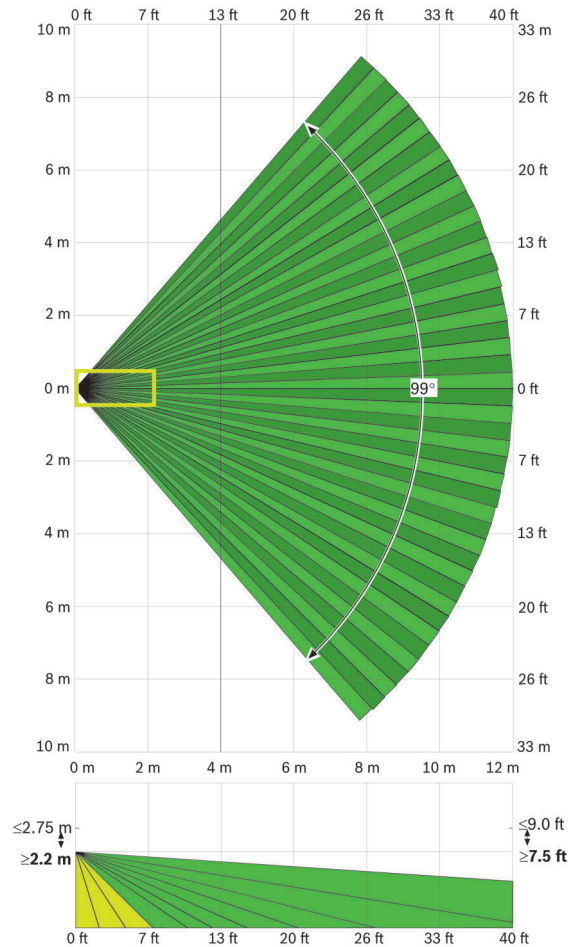

12 m x 12 m (40 ft x 40 ft) coverage

**Mounting**

The recommended mounting height is 2.2 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required.

The detector can be mounted:

- On a flat wall (surface, semi-flush), with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket.
- In a corner (the junction of two perpendicular walls).
- On the ceiling with the optional B338 Ceiling-mount Bracket.

**Parts included**

Quant.	Component
1	Detector
1	Hardware pack <ul style="list-style-type: none"> <li>• 2 anchors (#6, #8 x 7/8)</li> <li>• 2 screws (#6 x 1.25)</li> <li>• 1 cable tie (2.5 mm)</li> </ul>
1	Literature - Installation Instructions

## Technical specifications

### Electrical

Current (alarm/standby):	10 mA at 12 VDC
Voltage (operating):	9 VDC to 15 VDC

### Environmental

Environment:	Complies with EN50130-5 Class II
Relative Humidity:	0 to 95%, non-condensing <i>For UL Listed product installations, 0 to 85%, non-condensing</i>
Temperature (operating):	-30°C to +55°C (-20°F to +130°F) <i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i>

### Mechanical

Color:	white
Dimensions:	105 mm x 61 mm x 44 mm (4.2 in. x 2.4 in. x 1.7 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 150 kHz to 2 GHz at field strengths less than 30 V/m.

### Outputs

Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for $\leq 100$ mA, 25 VDC, 2.5 W, $< 20 \Omega$ closed
Tamper:	Normally-closed (NC) contacts (with cover on) rated for $\leq 100$ mA, 25 VDC, 2.5 W Connect tamper circuit to 24-hour protection circuit.

## Ordering information

### ISC-BPQ2 - Blue Line Gen2 Quad PIR Motion Detector (12 m [40 ft] coverage)

Uses two individual sensors that operate like two PIRs in one detector

Order number **ISC-BPQ2-W12**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com